

# V-Plow




The V-Plow has a 10 gauge steel body with 5/16" plate ribs on the back that run the full length making for an extremely rigid and strong backbone.



Take a Picture of This QR Code With Your Smart Phone to See it in Action



Adjustable skid shoes  
(not shown)

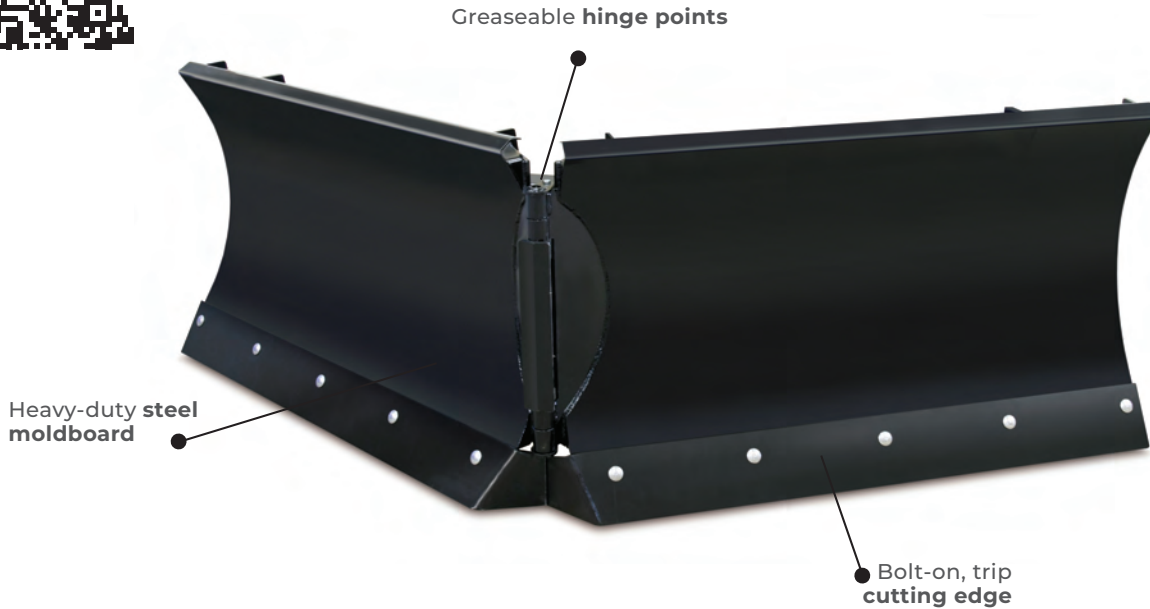

## FEATURES & BENEFITS

- Two-way hydraulic control provides full moldboard control in V, scoop, left and right positions
- 2" bore x 10" stroke cylinders with 1 1/4" rods and 1 1/4" cylinder pins
- Trip edge utilizing four extension springs
- Central cutting edge bracket is designed to block snow from passing through the blade hinge point
- Subframe is pinned to the mounting plate. This allows for 5 degrees of flex
- Infinite adjustable skid shoes

## SPECIFICATIONS / OPTIONS

Model	84"	96"	108"
Part Number	901613	901614	901615
Straight Blade Width	86"	98"	110"
Angled Blade Width	69"	79"	89"
V Position Width	75"	85"	96"
Scoop Position Width	63"	73"	81"
Blade Height	31.8"	31.8"	31.8"
Blade Angle	+/- 36°	+/- 36°	+/- 36°
Amount of Float	+/- 2.5°	+/- 2.5°	+/- 2.5°
Overall Length	41.75"	41.75"	41.75"
Moldboard Thickness	.135"	.135"	.135"
Bolt-on Cutting Edge	1/2" x 6"	1/2" x 6"	1/2" x 6"
Shipping Weight	1,000 lb.	1,050 lb.	1,100 lb.

### Options

Factory Installed Couplers

\* For more specification details please see our website [www.erskineattachments.com](http://www.erskineattachments.com)