




## Phoenix Reverse Tine Tillers 3 Heavy Duty Gear Drive Models from 60 to 74 Inches



The reverse rotation of our tiller tines forces the tiller down into the ground for deep smooth cultivation while bringing debris up over the top of the rotor. This unique action deposits larger debris first then covers it with finely pulverized soil particles for a smoother, cleaner finish. Get the final results you need in one pass!

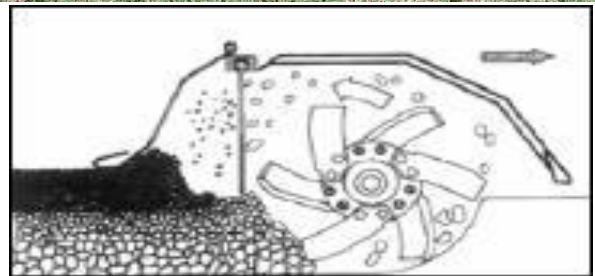

### Standard Features Include:

- Series 4 & 5 PTO W/ Slip Clutch by Eurocardan
- 6 Tines Per Flange
- Heavy Duty Drag Board
- Sliding/Adjustable Lower Hitch Blocks
- Heavy Duty Gear Drive Transmission
- Heavy Duty Adjustable Skids with Aprons for Quick Depth Adjustment

Specifications	T5R-60GE	T10R-66GE	T10R-74GE
WORKING WIDTH (Inches)	60	66	74
Working Depth (Inches)	7	4-8	4-8
Blades per Flange	6	6	6
Total Blades	42	48	54
Side Drive	Gear	Gear	Gear
Driveline Protection	Slip Clutch	Slip Clutch	Slip Clutch
Hitch	Cat I	Cat I	Cat I
PTO Shaft Series	4	5	5
PTO Power Required (HP)	20-35	35-50	35-50
Optimum PTO Speed (RPM)	540	540	540
Rotor Flange Diameter (Inches)	6.3	6.3	6.3
Rotar Flange Thickness (Inches)	0.4	0.5	0.5
Approximate Weight (LBS)	441	679	712

\* Uniform reserves the right to change specifications without notice.



For more information contact:  
 Unifarm Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893  
 Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997  
 Email: sales@unifarm.biz Website: www.unifarmmachinery.com