

MODELS	DESCRIPTION	WEIGHT
BSF-1523	3-pt. bale spear. Rated for round bales up to 1,800 lbs. Main spear is tapered with 44" usable length. Features welded balance spears. Cat. 1 & 2	57 lbs.
HS-3000	Dual bolt-in spears with cast steel pockets, 42" usable length. Round bales maintain orientation. Fits Cat. 1 & 2 quick hitches.	78 lbs.
HS-2200	3-pt. bale spear. Designed for round bales to 2200 lbs. Bolt-in spear with cast steel socket (patent pending) usable 42". Two balance spikes. Cat. 1 & 2.	72 lbs.
HS-330	3-pt. triple bale spear. Features bolt-in forged spears (26" usable length) in cast steel sockets (patent pending). For mid size square bales	163 lbs.
DBH-449	3-pt. four spear bale handler. Features bolt-in forged spears (42" usable) in cast steel sockets (patent pending). For 2 round bales	251 lbs.
DBH-6000	Four bolt-in spears, square frame design allowing transport of two 6-ft. round bales at once. Rated at 6,000 lbs. Overall unit width of 76". Fits Cat. 2 & 3 hitch & quick hitches.	



MODELS	DESCRIPTION	WEIGHT
BBSF-20	Bolt-on bucket bale spear for round bales. Rated at 2,000 lbs. Bolt-in spear has usable length of 42". Requires drilling one 17/32" dia. Hole in the bucket. Bolt-together design	65 lbs.
CBSF-2000	Clamp-on bucket bale spear for round bales. Rated at 2,000 lbs. Uses chain & turnbuckle system. Bolt-in spear has usable length of 42". Bolt-together design.	76 lbs.
CBSF-2028	Clamp-on bucket dual bale spear for round bales. Rated at 3,000 lbs. Uses chain & turnbuckle. Bolt-in spears have usable length of 42".	101 lbs.
CBSF-3028	Clamp-on bucket triple bale spear for square bales. Rated at 4,000 lbs. Uses dual chain & turnbuckles. Bolt-in spears have usable length of 42" Note: spears must be inserted into bale.	185 lbs.

MODELS	DESCRIPTION	WEIGHT
LSFB-22	Designed for pin-type loaders only. This unit is rated at 2,200 lbs. Bolt-in spear has 42" usable length. For use with round bales. Includes pin-on brackets. Not quick attach adaptable.	150 lbs.
LSFB-28	Designed for pin-type loaders only. This unit is rated at 3,000 lbs. Bolt-in spears have 42" usable length. For use with round bales. Includes pin-on brackets. Not quick attach adaptable.	165 lbs.
FLBS-2200	Loader bale spear rated at 2,200 lbs. Single tapered spear has usable length of 42". Optional interfacing brackets for most quick attach systems available.	121 lbs.
FLBS-3000	Loader bale spear rated at 3,000 lbs. Dual tapered spears have usable length of 42" Optional brackets for most quick attach systems available.	136 lbs.
FLBS-330	Loader bale spear rated at 3,000 lbs. for handling mid-size square bales. Triple spears have usable length of 26", spaced 26-1/2" apart. Optional interfacing brackets available.	164 lbs.
FLBS-340	Loader bale spear rated at 4,000 lbs. for handling larger square bales. Triple spears have usable length of 42", 26-1/2" apart. Optional interfacing brackets available.	198 lbs.
FLBS-342	Loader bale spear to handle mid-size square bales. Features 79-1/2" wide frame with 4 tapered spears – usable length 26", spaced 24". Optional interfacing brackets available.	169 lbs.
FLBS-449	Loader bale spear to handle large square bales. 79-1/2" wide frame with 4 tapered spears, usable length of 42", spaced 24". Optional interfacing brackets available.	212 lbs.

## LOADER BALE SPEARS



## ROUND BALE UNROLLERS



MODELS	DESCRIPTION	WEIGHT
HHU-2045	3-pt. hay handler / unroller. Rated at 2,000 lbs, it is designed for round bales either 4' or 5' in width and up to 6' in diameter. Requires a 2.5" x 8" hydraulic cylinder for operation (not included).	310 lbs.
FSO-906	3-pt. mounted hydraulically driven bale spin off for Cat. 1 & 2 size tractors. Requires 8-10 gpm of hydraulic flow. Tapered forged spear.	250 lbs.
FLSO-907	Front loader mounted hydraulically driven bale spin off. Requires 8-10 gpm of hydraulic flow. Tapered forged spear. Optional inter-facing brackets for most quick attach systems are available.	288 lbs.
SSO-908	Skid steer mounted hydraulically driven bale spin off. Requires 8-10 gpm of hydraulic flow. Designed to interface with "universal" skid steer quick-attach system.	325 lbs.

## JOHN DEERE LOADER SPEARS FITS JD SERIES LOADERS: 300, 400, 500, D & H



MODELS	DESCRIPTION	WEIGHT
JDBS-412	Single bolt-in forged spear with usable length of 42". Rated at 2,200 lbs. Two balance spikes, 1" x 8-1/2" usable.	121 lbs.
JDBS-423	Dual bolt-in forged spears spaced 26-1/2" apart, with usable length of 42". Rated at 3,000 lbs.	156 lbs.
JDBS-433	Triple bolt-in forged spears spaced 26-1/2" apart, with usable length of 26". Rated at 3,000 lbs. For mid-sizes square bales.	164 lbs.
JDBS-434	Triple bolt-in spears spaced 26-1/2" apart, with usable length of 42". 4,000 lb. rating. For large-sized square bales.	191 lbs.


MODELS	DESCRIPTION	WEIGHT
JDBS-612	Single bolt-in forged spear with usable length of 42". Rated at 2,200 lbs. Two balance spikes, 1" x 8-1/2". For round bales.	176 lbs.
JDBS-623	Dual bolt-in forged spears spaced 30" apart, with usable length of 42". Rated at 3000 lbs. for round bales.	196 lbs.
JDBS-633	Triple bolt-in forged spears spaced 28.5" apart, usable length of 26". Rated at 3,000 lbs. for mid sized square bales.	204 lbs.
JDBS-634	Triple bolt-in forged spears spaced 28.5" apart, usable length of 42". Rated at 4,000 lbs. for large sized square bales. Shown with optional uprights.	231 lbs.

## JOHN DEERE LOADER SPEARS FITS JD SERIES LOADERS: 600 & 700



MODELS	DESCRIPTION	WEIGHT
JDBS-1480	Single bolt-in forged spear. Large single spear useable length 52". Fits Global Series II Tool Carrier. Rated at 3,000 lbs. for round bales.	310 lbs.
JDBS-2480	Dual bolt-in forged spears spaced 30" apart, with useable length of 42". Fits Global Series II Tool Carrier. Rated at 3,800 lbs. for round bales.	265 lbs.
JDBS-3480	Triple bolt-in forged spears spaced 28" apart, useable length of 42". Fits Global Series II Tool Carrier. Rated at 4,000 lbs. for large square bales.	300 lbs.

## JOHN DEERE LOADER SPEARS FITS JD SERIES LOADERS: H-480

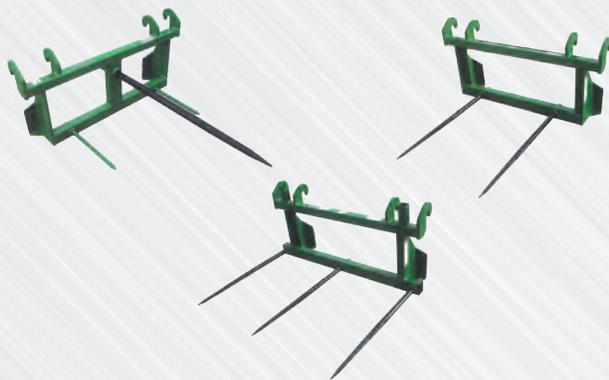

MODELS	DESCRIPTION	WEIGHT
GLB-2200	Single bolt-in forged spear with usable length of 42". Two balance spikes, 1" x 8-½" usable. For round bales. Rated at 2,200 lbs.	114 lbs.
GLD-3000	Dual bolt-in forged spears spaced 30" apart, with usable length of 42". For round bales. Rated at 3,000 lbs.	128 lbs.
GLB-6000	Designed for tractor front loaders that use the Euro/Global quick-attach system. Transport two 6' diameter bales at once. Frame size 76" x 24" with 4-bolt-in spears with 42" useable length. Rated 6,000 lbs.	265 lbs.
ELB-330	Triple bolt-in forged spears spaced 28.5" apart, with usable length of 26". Rated at 3,000 lbs. For mid sized square bales.	175 lbs.
ELB-340	Triple bolt-in forged spears spaced 28-½" apart, with usable length of 42". Rated at 4,000 lbs. For large-sized square bales.	200 lbs.

## EURO/GLOBAL STYLE BALE SPEARS



## BALE SPEARS SKID STEER QUICK-ATTACH



MODELS	DESCRIPTION	WEIGHT
SSB-2200	Skid steer single bale spear. Rated at 2,200 lbs. Designed to interface with "universal" skid steer quick-attach system. Bolt-in tapered spear has usable length of 42".	129 lbs.
SSB-3000	Skid steer double bale spear. Rated at 3,000 lbs. Designed to interface with "universal" skid steer quick-attach system. Bolt-in tapered spears have usable length of 42".	146 lbs.
SSRB-340	Skid steer triple bale spear. Rated at 4,000 lbs for handling large sized square bales. Bolt-in spears have usable length of 42", spaced 26.5" apart. Interfaces with "universal" skid steer quick-attach system.	190 lbs.
SSRB-330	Skid steer triple bale spear. Rated at 3,000 lbs for handling single or double (with optional uprights 830693) Mid-size Square bales. Bolt-in spears have usable length of 26", spaced 26-½" apart. Interfaces with "universal" skid steer quick-attach system.	165 lbs.

MODELS	DESCRIPTION	WEIGHT
RBH-4000	Large Rectangular Bale Handler. Rated at 4,000 lbs. Designed for tractor front loaders only. Unit will handle either two 4' x 4' x 8' or three 3' x 3' x 8' rectangular bales. Includes hydraulic cylinders. Optional interfacing brackets for most loaders are available.	799 lbs.
RBH-4000G	Large Rectangular Bale Handler for tractor front loaders w/ Euro/Global carrier system. Unit handles either two 4' x 4' x 8' or three 3' x 3' x 8' rectangular bales.	870 lbs.

## LARGE BALE HANDLERS

