

TECHNOLOGY THAT INCREASES PRODUCTIVITY

REAR BLADE



NB SERIES

GETS MORE FOR YOUR FIELD






BISON

REAR BLADE

NB SERIES

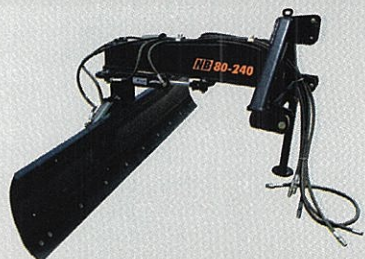

For a wide range of grading applications from road leveling to dam maintenance.

Models offered for different size tractors ranging from 65-120 HP.

The NB Series is capable of lateral and tilt movements by either manual or hydraulic adjustments.



SPECIFICATIONS		NB80-180	NB80-210	NB80-240	NB80-270
Length of Blade	ft	6	7	8	9
Approximate Weight (Manual/Hydraulic)	lbs	780/880	815/915	850/950	880/980
King Pin Diameter	in		3 1/4		
Height and Thickness of Moldboard	in		19 1/4		
Blade dimensions			1/2" x 6"		
			reversible blade		
Maximum HP	hp	65	70	75	80
Hitch type			3-pt CAT II / Quick attach CAT II ¹		
Swing angle	°		10 positions up to 50°, left or right (manual). Adjusts up to 45°, left or right (hydraulic) ² .		
Offset adjustment	in		4 positions up to 30", left or right (manual). Adjusts up to 24", left or right (hydraulic) ² .		
Tilt angle	°		3 positions up to 21°, up or down (manual). Adjusts up to 21°, up or down (hydraulic) ² .		
Total rotation			360		
Stand			Standard		

ESPECIFICACIONES		NB120-210	NB120-240	NB120-270	NB120-300
Length of Blade	ft	7	8	9	10
Approximate Weight (Manual/Hydraulic)	lbs	970/1070	1025/1125	1080/1180	1125/1235
King Pin Diameter	in		3 1/4		
Height and Thickness of Moldboard	in		19 1/4		
Blade dimensions			1/2" x 6"		
			reversible blade		
Maximum HP	hp	90	100	110	120
Hitch type			3-pt CAT II / Quick attach CAT II ¹		
Swing angle	°		10 positions up to 50°, left or right (manual). Adjusts up to 45°, left or right (hydraulic) ² .		
Offset adjustment	in		4 positions up to 30", left or right (manual). Adjusts up to 24", left or right (hydraulic) ² .		
Tilt angle	°		3 positions up to 21°, up or down (manual). Adjusts up to 21°, up or down (hydraulic) ² .		
Total rotation			360		
Stand			Standard		

¹ Bushings not included.

² Optional hydraulic control requires standard 3" x 8" hydraulic cylinders.

The Blade can rotate 360° without unhooking equipment.

Both the tilt and swing adjustments can be accomplished without changing or moving cylinders, as in other models.

BISON

Available Attachments:

Flow Control Valve.

Skid Shoes to help prevent damage to the cutting blade as well as the work surface.

Side Plates to help move more material.

* Tecnomec Agrícola, S.A. de C.V. reserves the right to make any changes deemed necessary to the specifications without prior notice.

* Some pictures may include options that are not a part of the standard equipment.

Contact your BISON dealer for more info and other available options.

www.bison.com.mx



Carretera a Paso Blanco Km. 2 No. 400 / Col. Vista Hermosa C.P. 20905
Jesús María, Aguascalientes, México
Tel. (449) 92-BISON / Fax. (449) 922 4767