

3-POINT PTO HEAVY-DUTY REAR MOUNT SNOWBLOWER

TRACTOR ATTACHMENT



This tough, dependable blower is built to go day after day. Features quick mount and dismount along with trouble-free chute rotation in all conditions. The blower chews through deep drifts and clears to the bare ground. Standard features include hydraulic chute rotation, reversible cutting edge, and adjustable skid shoes. These ruggedly built snow blowers are second-to-none in features, performance, and durability.

FEATURES

- · Single 18" or dual 16" augers with shear bolt protection
- · 4 bolt-on replaceable hardened skid shoes
- · Reversible cutting edge
- Standard hydraulic orbit motor chute rotator
- 4-blade fan with shear bolt protection

800.437.6912





3-POINT PTO HEAVY-DUTY REAR MOUNT SNOWBLOWER

TRACTOR ATTACHMENT









Model	925RM	965RM	1085RM
Part Number	920112	920113	920114
Stage	2	2	2
Number of Augers	1	2	2
Width of Cut	90"	96"	108"
Cutting Height	35"	36"	36"
Auger Diameter	Single 18"	Dual 16"	Dual 16"
Fan Diameter	26"	30" - 4 blade	30" - 4 blade
Discharge Chute	270° Hydraulic Rotator ¹ 2	270° Hydraulic Rotator ¹ 2	270° Hydraulic Rotator ¹ 2
PTO Speed	540 RPM	1,000 RPM	1,000 RPM
Casting Distance	Up to 35'	Up to 50'	Up to 50'
PTO Range	40-90 HP	90-175 HP	90-175 HP
Driveline Series	35	55	55
Cutting Edge	5/8" x 6" Reversible	5/8" x 6" Reversible	5/8" x 6" Reversible
Skid Shoes	Adjustable / Replaceable	Adjustable / Replaceable	Adjustable / Replaceable
Operating Weight	1,220 lb.	1,820 lb.	1,920 lb.
Hitch Category	Cat. II	Cat. II & III	Cat. II & III

Options

Hydraulic Deflector

Electric Deflector

Hydraulic Truck Loading Chute

Electric Deflector for Truck Loading Chute

¹Truck loading chute with deflector is optional

²Includes deflector and 3-position linkage, hydraulic or electric is optional


800.437.6912





3-POINT PTO HEAVY-DUTY REAR MOUNT SNOWBLOWER

TRACTOR ATTACHMENT

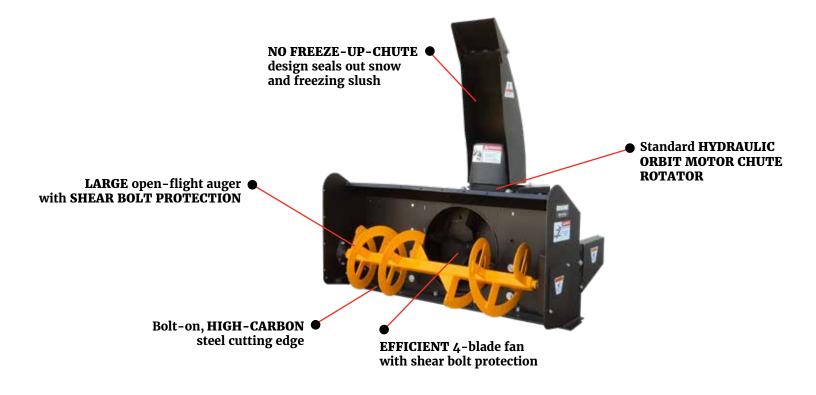



Standard hydraulic orbit motor chute rotator



Large open-flight auger with shear bolt protection

800.437.6912

