

3-POINT PTO SOIL CONDITIONER TRACTOR ATTACHMENT



Our 3-Point Soil Conditioner is an attachment that pays for itself in a very short amount of time by replacing your hand labor work crew. This versatile unit rakes stones and debris to either side or straight ahead for easy pickup. The aggressive teeth on the large-diameter rotor pulverize soil like an ordinary tiller, with the benefit of faster ground speed. The counter-rotating rotor moves soil ahead of it as it tills, filling in low spots and chewing off high spots. It creates perfect seedbeds and windrows. The 3-Point Soil Conditioner separates rocks, tears up sod, and pulverizes dirt clods. We rake and till deeper than anyone – as deep as 4".

FEATURES

- Driveline slip clutch protection
- Tungsten carbide teeth
- Power angling (optional)
- Large solid rubber wheels
- Rubber shields
- Teeth are welded in a spiral pattern

800.437.6912

© 2019 Erskine Attachments, LLC. All rights reserved.

043019



ERSKINE ATTACHMENTS LLC www.erskineattachments.com 800.437.6912

3-POINT PTO SOIL CONDITIONER TRACTOR ATTACHMENT



The aggressive teeth on the large-diameter rotor pulverize soil like an ordinary tiller, with the benefit of faster ground speed.



The 3-Point Soil Conditioner separates rocks, tears up sod, and pulverizes dirt clods.

Model	SC72	SC84
Part Number	920012	920014
Rotor Width	72"	84"
Overall Width	82.9"	94.5"
Angling	15° manual	15° manual
Wheels/Tires	18 x 8.5 polyurethane	18 x 8.5 polyurethane
Teeth	88 carbide tipped	104 carbide tipped
Hitch Category	Cat. I & II	Cat. 1 & II
Operating Weight	1,275 lb.	1,350 lb.
Rotor Diameter	10"	10"
Rotor Speed	187 RPM	187 RPM
Recommended HP	25-55 HP	25-55 HP

Options

Hydraulic Angling Package w/hoses/couplers

Wing Kit

800.437.6912

© 2019 Erskine Attachments, LLC. All rights reserved.


043019

ERSKINE

She



3-POINT PTO SOIL CONDITIONER TRACTOR ATTACHMENT

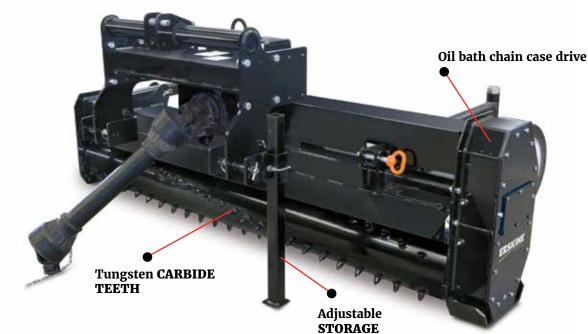

STAND



The massive 10" rotor gives you the ability to till more aggressively and move more dirt faster.



Self-adjusting slip clutches provide driveline protection from overload caused by rotor contact with immovable material situations and ground contact.

800.437.6912

© 2019 Erskine Attachments, LLC. All rights reserved.

ERSKINE

and the second s

043019