

**ERSKINE**<sup>®</sup>  
ATTACHMENTS LLC

www.erskineattachments.com  
800.437.6912

## HYDRAULIC SNOWBLOWERS

2020, 2420 & 2420XL SERIES



### THE NORDIC SPIRIT OF INNOVATION...

*The First, Is Still The Best &  
One of The World's #1 Selling  
Snowblowers*

### OUR STORY...

We are proudly celebrating our 70th year as a pioneer in designing and manufacturing snow blowing equipment and as a premier manufacturer of attachments for skid steers, mini skid steers, ATV/UTVs, wheel loaders and tractors.

Our manufacturing facility is the original manufacturer of the rear pull and front mounted snowblowers for tractors and the hydraulic snowblower for hydraulic powered power units. We are known in the industry for setting the standards and benchmarks for quality and performance, especially for snow removal equipment.

In 1948, our manufacturing facility was founded to meet the needs of local farmers located in northwestern Minnesota who were snowbound to their farms because of the amount of snowfall, blowing and drifted snow. The farmers milked cows and the bulk trucks couldn't reach their farm sites.

Northwestern Minnesota is heavily populated with the independent Scandinavian spirit. That spirit of self-determination clearly saw the problem and then birthed the solution. The region's farmers came together and designed the first snowblowers for tractors.

That same spirit of self-determination exists today at our manufacturing facility. We see problems as opportunities and we offer solutions to solve those problems that benefit our customers and society. So, when our dealers told us that they needed a Heavy-Duty Hydraulic Snowblower, we knew we could deliver. We are proud to introduce our newly redesigned Heavy-Duty Hydraulic Snowblowers for small and large frame, low and high flow equipped skid steer loaders and tractors. This new open design was tested and proven by industry professionals in one of the harshest snow climates on the planet, Nevada's Sierra Mountains.

**The Heavy-Duty Hydraulic Snowblower is available for Skid Steers and Euro/Global Mount Tractors. Call now!**

**800.437.6912**

**ERSKINE**<sup>®</sup>  
ATTACHMENTS LLC

# ERSKINE<sup>®</sup>

ATTACHMENTS LLC

www.erskineattachments.com

800.437.6912

## 2020 HYDRAULIC SNOWBLOWER SERIES

### SKID STEER ATTACHMENT

## NEW DESIGN FOR 2018

DEFLECTOR  
CYLINDER

NO-FREEZE-UP CHUTE  
design seals out snow  
and freezing slush

FOUR-BLADED  
FAN DESIGN

Optional:  
Urethane (left) or  
Hardened (right)  
Skid Shoes



Optional:  
Rubber or Urethane  
Protective Cutting Edges.



SERRATED edges

NO CHAINS, SPROCKETS  
OR PTO SHAFTS  
direct-drive hydraulic auger  
eliminates problematic  
chain drive

GREASABLE bearings

Standard HIGH-CARBON  
steel cutting edge



Optional urethane skid shoes  
(Top) and cutting edge (Bottom)



DEFLECTOR  
CYLINDER

GREASABLE  
rollers

SPIN-FORMED  
fan housing

STEEL  
TUBE LINES

SAFETY STEPS

ADJUSTABLE HEIGHT  
Mounting Plate design

EASY MOTOR  
ACCESS

STEEL  
TUBE LINES

HEAVY-DUTY  
SKID SHOES



Optional:  
Wire Harness for hydraulic  
models with attachment  
controls. Fits Cat/ASV (8-pin)  
and John Deere/New Holland/  
CASE/Bobcat (14-pin).



Optional:  
Pistol Grip Control Harness is  
required if skid steer is NOT  
equipped with attachment  
control system.

# 800.437.6912

# ERSKINE<sup>®</sup>

ATTACHMENTS LLC





www.erskineattachments.com  
800.437.6912

## 2020 HYDRAULIC SNOWBLOWER SERIES

### SKID STEER ATTACHMENT

Model	2020 - 48"	2020 - 55"	2020 - 61"	2020 - 73"	2020 - 79"	2020 - 85"
Part Number	901442	901444	901446	901448	901450	901452
Stage	2	2	2	2	2	2
Width of Cut	48"	55"	61"	73"	79"	85"
Cutting Height	29"	29"	29"	29"	29"	29"
Cutting Edge	5/8" x 6" bolt-on	5/8" x 6" bolt-on	5/8" x 6" bolt-on	5/8" x 6" bolt-on	5/8" x 6" bolt-on	5/8" x 6" bolt-on
Auger Diameter	16" open flight	16" open flight	16" open flight	16" open flight	16" open flight	16" open flight
Fan Diameter	20" 4-blade	20" 4-blade	20" 4-blade	20" 4-blade	20" 4-blade	20" 4-blade
Chute Rotation	Hydraulic 270°	Hydraulic 270°	Hydraulic 270°	Hydraulic 270°	Hydraulic 270°	Hydraulic 270°
Pressure Relief	Auger	Auger	Auger	Auger	Auger	Auger
Casting Distance	Up to 40'	Up to 40'	Up to 40'	Up to 40'	Up to 40'	Up to 40'
Operating Weight	650 lb.	675 lb.	710 lb.	770 lb.	790 lb.	820 lb.
Mounting Plate	Universal/Mini	Universal	Universal	Universal	Universal	Universal
Hoses	Included	Included	Included	Included	Included	Included
Hydraulic Flow	11-25 GPM	11-25 GPM	11-25 GPM	11-25 GPM	11-25 GPM	11-25 GPM
Operating Pressure	2,500-3,500 psi	2,500-3,500 psi	2,500-3,500 psi	2,500-3,500 psi	2,500-3,500 psi	2,500-3,500 ps
Standard Skid Shoes	STD	STD	STD	STD	STD	STD

Options						
Serrated Auger	Optional	Optional	Optional	Optional	Optional	Optional
Hardened Skid Shoes	Optional	Optional	Optional	Optional	Optional	Optional
Urethane Skid Shoes	Optional	Optional	Optional	Optional	Optional	Optional
Urethane Cutting Edge	Optional	Optional	Optional	Optional	Optional	Optional
Rubber Cutting Edge	Optional	Optional	Optional	Optional	Optional	Optional
Pistol Grip Control	Optional	Optional	Optional	Optional	Optional	Optional
Loader Specific Wire Harness	Optional	Optional	Optional	Optional	Optional	Optional
Factory Installed Couplers	Optional	Optional	Optional	Optional	Optional	Optional

800.437.6912



# ERSKINE<sup>®</sup>


ATTACHMENTS LLC

www.erskineattachments.com

800.437.6912

## 2420 HYDRAULIC SNOWBLOWER SERIES

### SKID STEER ATTACHMENT

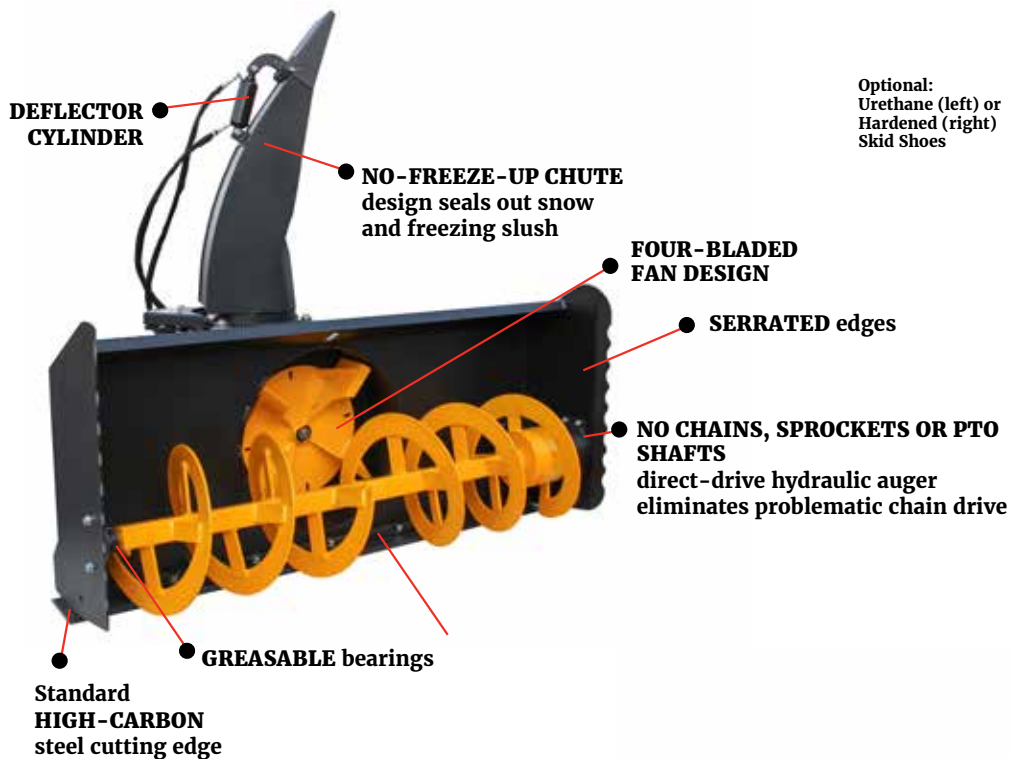

Optional:  
Urethane (left) or  
Hardened (right)  
Skid Shoes



Optional:  
Rubber or Urethane  
Protective Cutting Edges.




Optional urethane skid shoes  
(Top) and cutting edge (Bottom)



Optional:  
Wire Harness for hydraulic  
models with attachment  
controls. Fits Cat/ASV (8-pin)  
and John Deere/New Holland/  
CASE/Bobcat (14-pin).



Optional:  
Pistol Grip Control Harness is  
required if skid steer is NOT  
equipped with attachment  
control system. (Only needed  
when ordering hydraulic  
angling model).

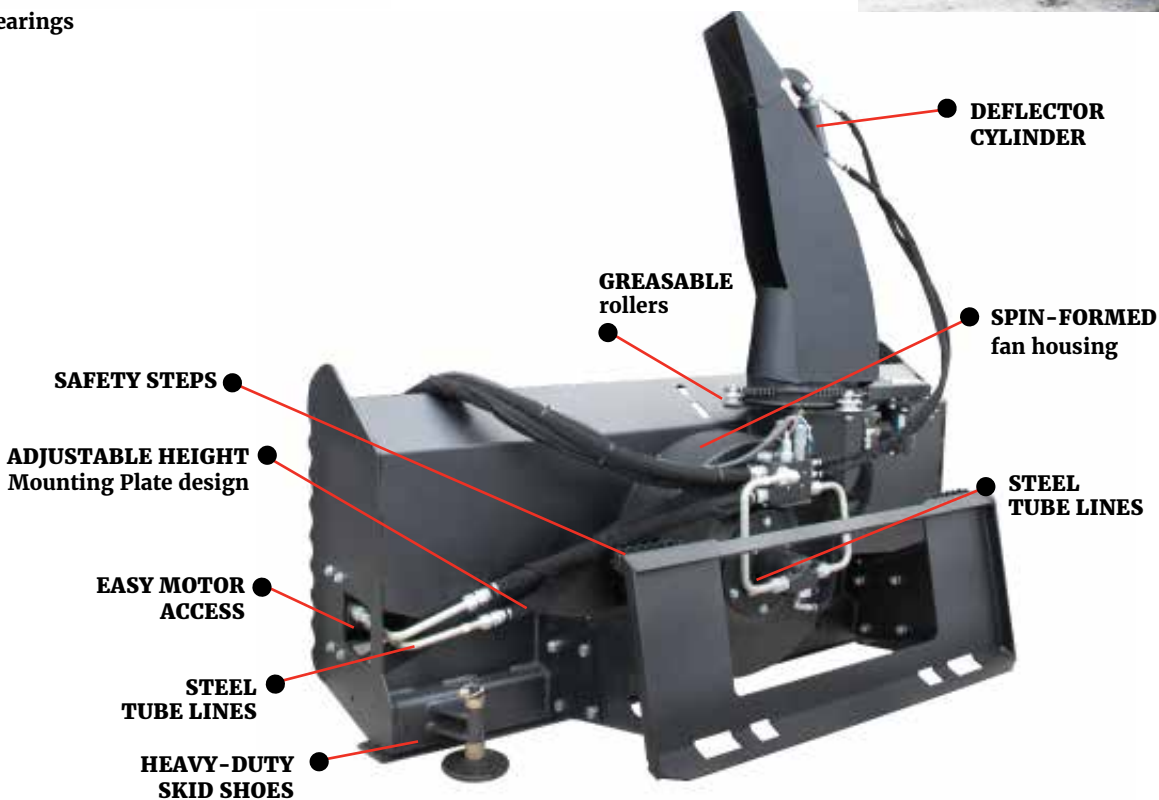

800.437.6912

ERSKINE<sup>®</sup>

ATTACHMENTS LLC

**2420 HYDRAULIC SNOWBLOWER SERIES****SKID STEER ATTACHMENT**

Model	2420 – 55"	2420 – 61"	2420 – 73"	2420 – 79"	2420 – 85"
Part Number	901454	901455	901456	901457	901458
Stage	2	2	2	2	2
Width of Cut	61"	61"	73"	79"	85"
Cutting Height	36"	36"	36"	36"	36"
Cutting Edge	5/8" x 6" bolt-on	5/8" x 6" bolt-on	5/8" x 6" bolt-on	5/8" x 6" bolt-on	5/8" x 6" bolt-on
Auger Diameter	18" open flight	18" open flight	18" open flight	18" open flight	18" open flight
Fan Diameter	24" 4-blade	24" 4-blade	24" 4-blade	24" 4-blade	24" 4-blade
Chute Rotation	Hydraulic 270°	Hydraulic 270°	Hydraulic 270°	Hydraulic 270°	Hydraulic 270°
Pressure Relief	Auger	Auger	Auger	Auger	Auger
Casting Distance	Up to 40'	Up to 40'	Up to 40'	Up to 40'	Up to 40'
Operating Weight	765 lb.	800 lb.	875 lb.	910 lb.	940 lb.
Mounting Plate	Universal	Universal	Universal	Universal	Universal
Hoses	Included	Included	Included	Included	Included
Hydraulic Flow Requirement	24–38 GPM	24–38 GPM	24–38 GPM	24–38 GPM	24–38 GPM
Operating Pressure	2,500–3,500 psi	2,500–3,500 psi	2,500–3,500 psi	2,500–3,500 psi	2,500–3,500 psi
Standard Skid Shoes	STD	STD	STD	STD	STD

Options					
Serrated Auger	Optional	Optional	Optional	Optional	Optional
Hardened Skid Shoes	Optional	Optional	Optional	Optional	Optional
Urethane Skid Shoes	Optional	Optional	Optional	Optional	Optional
Pistol Grip Control Harness	Optional	Optional	Optional	Optional	Optional
Loader Specific Wire Harness	Optional	Optional	Optional	Optional	Optional
High Flow Couplers (Installed)	Optional	Optional	Optional	Optional	Optional
Urethane Cutting Edge	Optional	Optional	Optional	Optional	Optional
Rubber Cutting Edge	Optional	Optional	Optional	Optional	Optional
Pistol Grip Control	Optional	Optional	Optional	Optional	Optional
Factory Installed Couplers	Optional	Optional	Optional	Optional	Optional



# ERSKINE<sup>®</sup>


ATTACHMENTS LLC

www.erskineattachments.com

800.437.6912

## 2420XL HYDRAULIC SNOWBLOWER SERIES

### SKID STEER ATTACHMENT

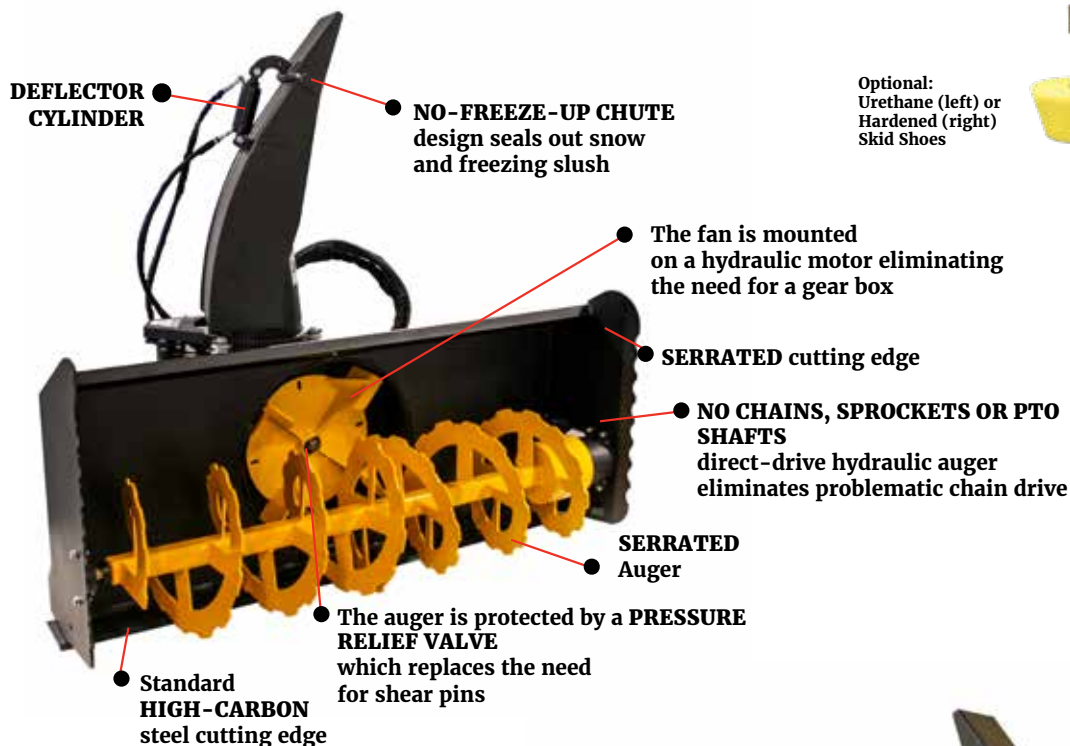

Optional:  
Urethane (left) or  
Hardened (right)  
Skid Shoes



Optional:  
Rubber or Urethane  
Protective Cutting Edges.




Optional urethane skid shoes (Top) and cutting edge (Bottom)



Optional:  
Wire Harness for hydraulic models with attachment controls. Fits Cat/ASV (8-pin) and John Deere/New Holland/CASE/Bobcat (14-pin).



Optional:  
Pistol Grip Control Harness is required if skid steer is NOT equipped with attachment control system. (Only needed when ordering hydraulic angling model).

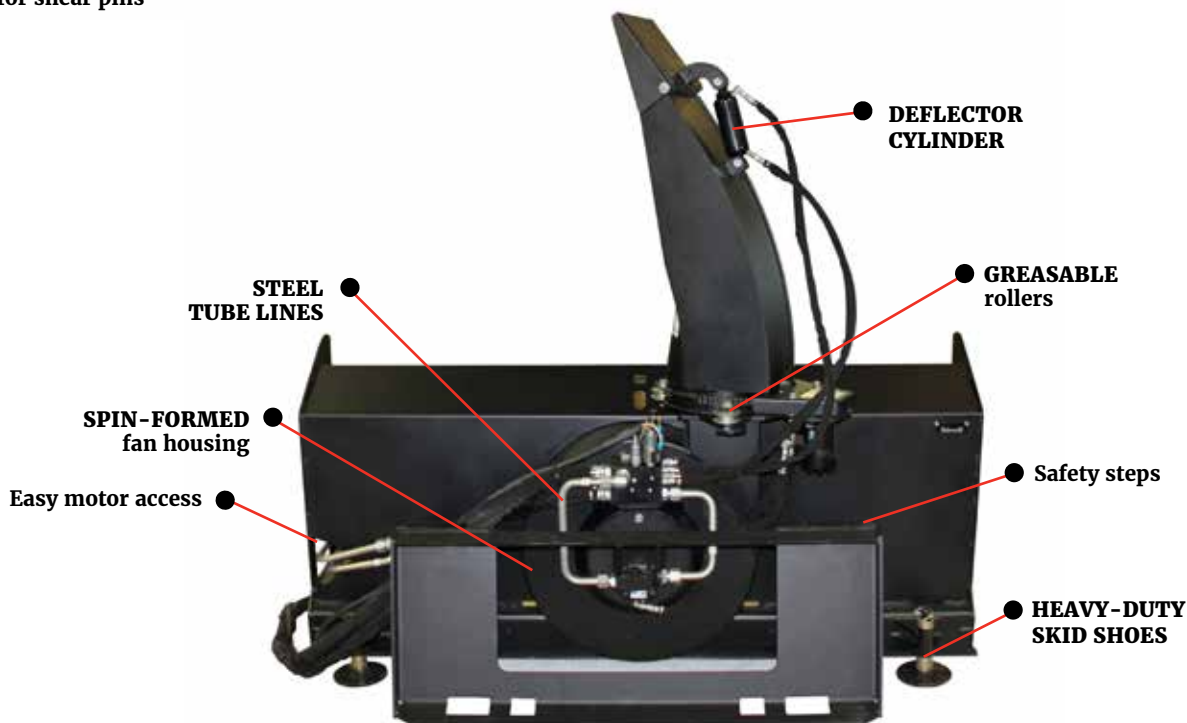


800.437.6912

ERSKINE<sup>®</sup>  
ATTACHMENTS LLC

**2420XL HYDRAULIC SNOWBLOWER SERIES****SKID STEER ATTACHMENT**

Model	2420XL-61"	2420XL-73"	2420XL-79"	2420XL-85"	2420XL-96"
Part Number	901459	901460	901461	901462	901463
Stage	2	2	2	2	2
Serrated Auger	Standard	Standard	Standard	Standard	Standard
Width of Cut	61"	73"	79"	85"	97"
Cutting Height	36"	36"	36"	36"	36"
Cutting Edge	5/8" x 6" bolt-on	5/8" x 6" bolt-on	5/8" x 6" bolt-on	5/8" x 6" bolt-on	5/8" x 6" bolt-on
Auger Diameter	18" open flight	18" open flight	18" open flight	18" open flight	18" open flight
Fan Diameter	24" 4-blade	24" 4-blade	24" 4-blade	24" 4-blade	24" 4-blade
Chute Rotation	Hydraulic 270°	Hydraulic 270°	Hydraulic 270°	Hydraulic 270°	Hydraulic 270°
Pressure Relief	Auger	Auger	Auger	Auger	Auger
Casting Distance	Up to 45'	Up to 45'	Up to 45'	Up to 45'	Up to 45'
Operating Weight	850 lb.	915 lb.	950 lb.	980 lb.	1,050 lb.
Mounting Plate	Universal	Universal	Universal	Universal	Universal
Hoses	Included	Included	Included	Included	Included
Hydraulic Flow Requirement	30-50+ GPM	30-50+ GPM	30-50+ GPM	30-50+ GPM	30-50+ GPM
Operating Pressure	3,000-4,500 psi	3,000-4,500 psi	3,000-4,500 psi	3,000-4,500 psi	3,000-4,500 psi
Standard Skid Shoes	Standard	Standard	Standard	Standard	Standard

Options					
Hydraulic Truck Loading Chute	Optional	Optional	Optional	Optional	Optional
Urethane Skid Shoes	Optional	Optional	Optional	Optional	Optional
Urethane Cutting Edge	Optional	Optional	Optional	Optional	Optional
Rubber Cutting Edge	Optional	Optional	Optional	Optional	Optional
Pistol Grip Control Harness	Optional	Optional	Optional	Optional	Optional
Loader Specific Wire Harness	Optional	Optional	Optional	Optional	Optional
Factory Installed High Flow Couplers	Optional	Optional	Optional	Optional	Optional
Factory Installed Couplers	Optional	Optional	Optional	Optional	Optional

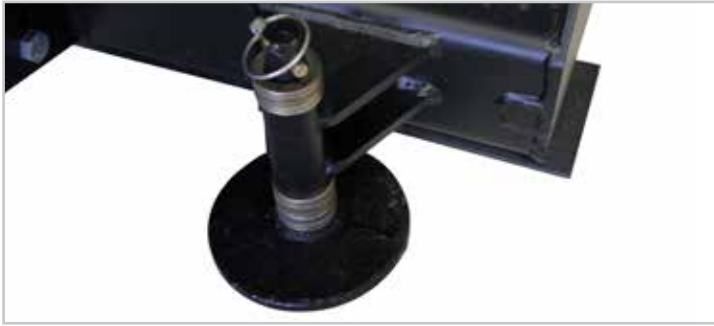

### Heavy-Duty Skid Shoes

Our adjustable skid shoes allow the operator to make quick and easy height adjustments.



### Heavy-Duty Serrated Side Plates

Our unique heavy-duty serrated side plate design made of 7 gauge steel on the 2020 and 1/4" on the 2420/XL. The snowblower with the serrated side plates is able to cut into hard-packed drifted snow or hard-packed piles of snow. This allows the auger to grind away at the pile loosening snow to feed to the fan.




### 16" Serrated Auger on the 2020 Series, or 18" on the 2420 is Optional, Standard on the 2420XL Series

Our unique high capacity fan and motor system requires a large 16" or 18" auger design that can handle more snow material. Our serrated auger design cuts through hard-packed snow and ice. This flighting completely covers the middle of the auger so there isn't a "dead spot".



### Standard Single Ribboned Auger

Standard auger flighting on the 2020 and 2420 series, is extra thick to increase lifespan in abrasive environments. Narrower flighting pitch makes the structure stiffer to withstand impacts better and move more snow to the center where the fan is located allowing our snowblower to blow more snow than our competitors.

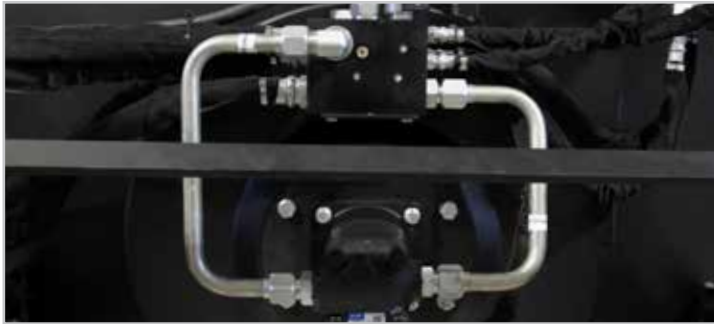

### Steel Tube Fittings

Steel tubelines are used to increase efficiency by making the oil path shorter, with smooth flowing corners. They are also more puncture resistant than hoses.








### **Our Unique Cutting Edge Design**

The angled cutting edge is tipped down at 10 degrees to allow it to scrape ice and packed snow more easily. The blower body can still be rolled back for a less aggressive cut.



### **Three Greasable Rollers**

The curved surface of the rollers reduces friction and prevents ice buildup from stopping the chute. Hydraulic chute rotation and deflection is standard equipment\*. Our design eliminates metal-to-metal contact between the blower and the rotating chute base, preventing freeze-up under any conditions.

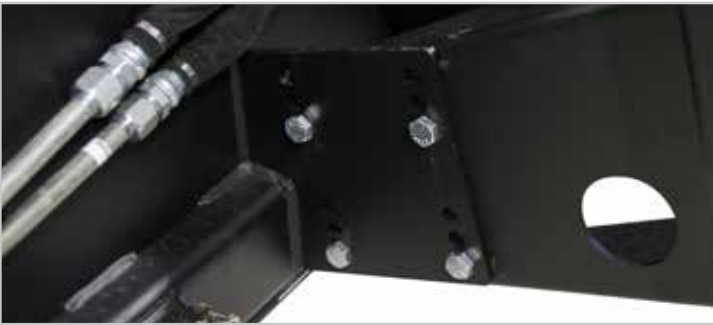

### **Adjustable Mounting Plate**

Our unique adjustable height mounting plate design offers the customer 3 positions to match the mounting plate height of a variety of skid steers to create the proper adjustment for their power unit.



### **Highly Engineered Spun-Formed Fan Housing**

Spun-formed fan housing is held to tighter tolerances than hand formed wrappers. This allows a tighter fit with the fan which increases system efficiency. With this increased efficiency our snowblower constantly outperforms our competitors making our snowblower year in and year out the top performing snowblower in it's class.



### **Two Safety Steps**

Two conveniently located steps provide a safe and easy entry and exit from the cab of your loader. Open mounting plate design allows for easy access.




### **Greasable Bearing**

The Heavy-duty greasable bearing supports the right side of the auger. It is easily accessed for maintenance.

**800.437.6912**

**ERSKINE**  
ATTACHMENTS LLC

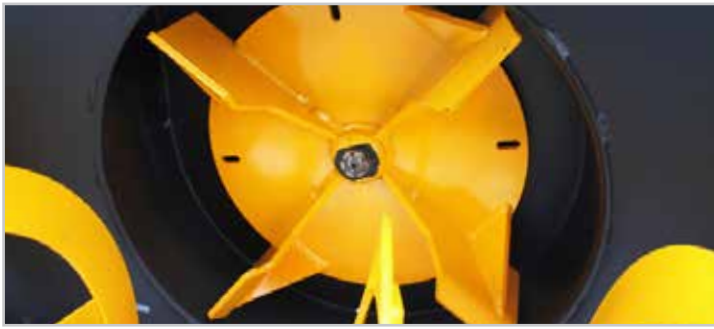

#### **4-Bladed Fan Design**

Our unique 4-bladed fan design (20" in the 2020 series or 24" in the 2420/XL series) is precisely designed and robotic welded. Our unique four-bladed cupped fan is more efficient and throws a smoother and larger stream of snow than our competitors.




#### **Greaseable Auger.**

Our unique auger drive shaft is greaseable to prevent off season corrosion.



#### **Robotically Welded Chute Design**

In order to accommodate the high volume of snow created by the combination of our unique motor and fan design we had to invent a robust, high capacity chute. We designed our chute to have specific arc and a large, short throat to accommodate a continuous high volume stream of snow.

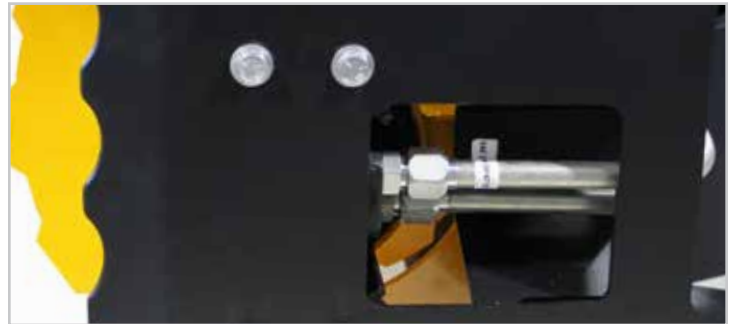

#### **Easy access to motor.**

Auger motor connections are easily accessed to increase serviceability.

Snow removal equipment is one of our sweet spots. After all, snow removal is why the company was founded over 70 years ago. There simply is no company in the snowblower industry with more experience than Erskine Attachments®. Each one of our snowblowers are custom built for the specific power unit they are being used on, ensuring the best performance possible. A quality built snow blower that really works! Throw snow up to 45' while clearing paths down to the ground. We pride ourselves on having the best performing products in the marketplace.

Whether in the mountains, commercial or municipal snow removal, this snowblower is built to handle long hours and tough conditions, and will keep you moving!

## **FEATURES**

- Hydraulic control valves with electric solenoids provide you the ability to operate from the comfort of your cab to easily use attachment control functions, hydraulically adjusting the chute and deflector
- Hydraulic pressure relief valve allows our snowblower to have no shear pins and prevents unnecessary auger damage.
- The fan is mounted to a hydraulic motor, eliminating the need for a gear box.
- No Chains, sprockets or PTO shafts, this is old technology. Direct-drive hydraulic auger eliminates problematic chain drive.
- No freeze-up chute design seals out snow and freezing slush
- High-Carbon steel, reversible and replaceable bolt-on cutting edge.
- Easily adjustable depth skid shoes
- Our universal attachment plates fit most skid steers

**800.437.6912**

**ERSKINE**  
ATTACHMENTS LLC



**ERSKINE**<sup>®</sup>  
ATTACHMENTS LLC

www.erskineattachments.com  
800.437.6912

## HYDRAULIC SNOWBLOWERS

SKID STEER ATTACHMENTS

### 2020 SERIES SKID STEER



### 2420 SERIES SKID STEER



### 2420XL SERIES SKID STEER



800.437.6912

**ERSKINE**<sup>®</sup>  
ATTACHMENTS LLC