

ERSKINE[®]
ATTACHMENTS LLC

www.erskineattachments.com

800.437.6912

MINI EARTH AUGER

MINI SKID STEER ATTACHMENT



AUGER FASTER...

The powerful mini earth auger drive units are durable enough to withstand any construction or utility use with your mini skid steer in even the toughest ground conditions. These direct drive units produce high torque at low speeds and offer reverse rotation for cleaning of the hole.

FEATURES

- Direct-Drive design
- 2" hex head
- Auger head pivots front to back and side to side
- Pivot side to side has a locking method provided

800.437.6912

ERSKINE[®]
ATTACHMENTS LLC

MINI EARTH AUGER

MINI SKID STEER ATTACHMENT


Model	Mini	10PD	11PD	14PD	18PD
Part Number (ASV RC30)	900752	901332	N/A	N/A	N/A
Part Number (Toro)	900752	N/A	901320	901321	901322
Part Number (Bobcat)	900752	N/A	901326	901327	901326
Maximum Diameter	30"	24"	24"	30"	36"
Minimum Hydraulic Flow	7 GPM	6 GPM	6 GPM	10 GPM	15 GPM
Maximum Hydraulic Flow	15 GPM	15 GPM	12 GPM?	20 GPM	25 GPM
Maximum Continuous psi	3,000 psi	3,500 psi	3,500 psi	3,500 psi	3,500 psi

Mounting Kit Configurations	
	ASV/Terex (RC/PT30)
	Bobcat (MT-52/55, 463/S70)
	Toro / Vermeer / Boxer / Ditch Witch / Ramrod / Kanga / Cormidi
	Universal Mounting Plate (up to 1,000 lb. ROC and within rated flow)
Maximum Tree Diameter	8"
Maximum Jaw Opening	12"
Tooth Material	1/2" A-36
Overall Height	31"
Overall Width	48"
Overall Length	40"
Weight	350 lb.

Standard Duty Bits	Heavy-Duty Bits
4"	6"
6"	8"
8"	9"
9"	10"
10"	12"
12"	15"
15"	16"
16"	18"
18"	20"
20"	24"
24"	30"
30"	

MINI EARTH AUGER

MINI SKID STEER ATTACHMENT

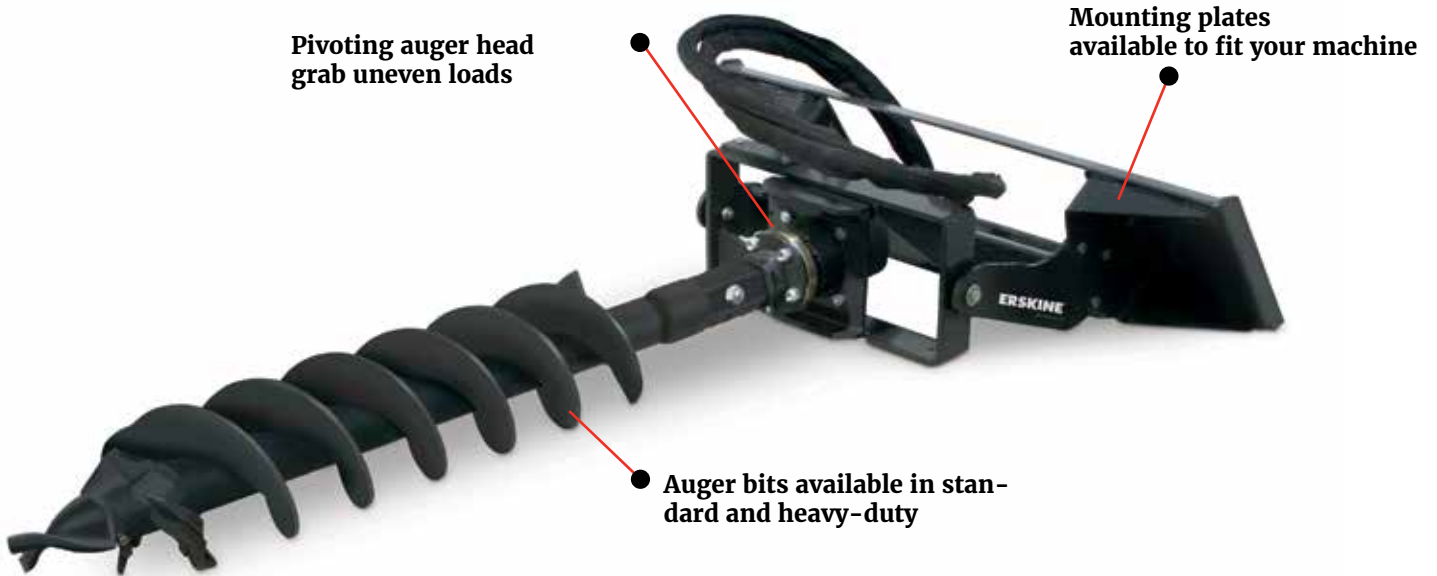

Standard Duty Bits

- 4"
 - 6"
 - 8"
 - 9"
 - 10"
 - 12"
 - 15"
 - 16"
 - 18"
 - 20"
 - 24"
 - 30"
- For light to moderate ground conditions
 - Fabricated boring head
 - Hardened bolt-on gauge teeth (outside positions)
 - Hardened bolt-on wisdom teeth (inside positions)
 - Hardened fishtail point
 - HD, double flighting
 - Available in 42" lengths

Heavy-Duty Bits

- 6"
 - 8"
 - 9"
 - 10"
 - 12"
 - 15"
 - 16"
 - 18"
 - 20"
 - 24"
 - 30"
- For difficult ground conditions, compacted soils, heavy clay, asphalt, frozen ground, fracturable rock
 - HD cast steel boring head
 - Fabricated boring head
 - Hardened drive-in gauge teeth (outside positions)
 - Hardened drive-in chisel teeth (inside positions)
 - Hardened fishtail point
 - HD, double flighting
 - Available in 42" lengths