

POWER ANGLE BROOM *skid steer attachment*

A PERFECT SWEEP....

The Power Angle Broom is designed for heavy-duty sweeping of dirt, snow, and other unwanted material. It quickly mounts to your skid steer or tractor loader. Featuring a 68" or 84" width, hydraulic angle change, and our exclusive Floating Torsion Suspension System[™].

FEATURES

- Easy operation
- Exclusive Torsion Float Suspension
- Fast wafer change time
- Manual 25° right and left angle
- Optional hydraulic angling 25° right & left angle
- Greaseable bearings for longer wear life
- Hydraulic drive motor (no chains) mounted inside brush arbor
- Loader arms raise and lower broom
- Large 32" heavy-duty wafer packages available
- Our universal attachment plates fit most skid steers

800.437.6912



POWER ANGLE BROOM *skid steer attachment*



Model	680 / 680X / 680XL	840 / 840X / 840XL	960 / 960X / 960XL
Width	68"	84"	96"
Width Fully Angled	63" @ 25°	77" @ 25°	89" @ 25°
Broom Angling	Manual 25° / Hyd 25° / Hyd 25°	Manual 25° / Hyd 25° / Hyd 25°	Manual 25° / Hyd 25° / Hyd 25°
Drive System	Hydraulic Motor Direct-Drive	Hydraulic Motor Direct-Drive	Hydraulic Motor Direct-Drive
Skid Steer Flow Range	13 - 24 GPM	13 - 24 GPM	13 - 24 GPM
Wafer Diameter	32"	32"	32"
Wafer Sections (number)	33 zig-zag	40 zig-zag	48 zig-zag
Mounting Plate	Universal	Universal	Universal
Weight	790 lb.	850 lb.	910 lb.
Reversible Valve Block	Included w/XL model	Included w/XL model	Included w/XL model
Weight	840 lb.	920 lb.	1,000 lb.

Options			
Pistol Grip Control Harness*	\$495	\$495	\$495
Loader Specific Wire Harness*	\$195	\$195	\$195
Factory Installed Couplers	\$125	\$125	\$125

800.437.6912

800.437.6912

www.erskineattachments.com



Ste

POWER ANGLE BROOM SKID STEER ATTACHMENT




www.erskineattachments.com

800.437.6912

Optional: Pistol Grip Control Harness is required if skid steer is NOT equipped with attachment control system. (Only needed when ordering hydraulic angling model).



Optional: Wire Harness for hydraulic models with attachment controls. Fits Cat/ASV (8-pin) and John Deere/New Holland/ CASE/Bobcat (14-pin).

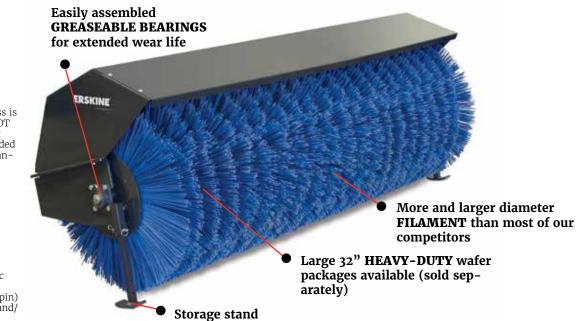

*Standard Manual Model 68" (w/ploy wafer package)





800.437.6912

