

# FLAIL MOWERS / SHREDDERS



FIXED OR OFFSET HITCH • Up to 72 HP



## SMWA SERIES - REVERSIBLE

### FEATURES

- Reversible Cat. 1, 3-point hitch
- Shredders are center mount or offset 6" to the right
- Shreds brush and prunings up to 2"
- Drop forged hammer knives and cutter bars
- 72 HP gearbox with built-in overrunning clutch

Ideal for vineyards, roadsides, parks, pastures, rental yards and heavy cover crop applications.

Rear hatch is slotted to accept optional rake teeth for applications that require additional pick up of material.



REVERSE CONFIGURATION

MODELS	WORKING WIDTH	OVERALL WIDTH	HP REQ'D	HITCH	FLAILS	HOUSING THICKNESS	ROTOR DIA. LESS BLADES	ROLLER DIAMETER	NO. OF BELTS	WEIGHT
SMWA-REV-135	53"	61"	24	Cat. 1 Center & 7" Offset	12	4MM Dbl. Skin	5"	5-1/4"	3	765
SMWA-REV-155	61"	69"	26	Cat. 1 Center & 7" Offset	15	4MM Dbl. Skin	5"	5-1/4"	3	835
SMWA-REV-175	69"	77"	30	Cat. 1 Center & 7" Offset	18	4MM Dbl. Skin	5"	5-1/4"	3	935
SMWA-REV-200	79"	87"	35	Cat. 1 Center & 7" Offset	21	4MM Dbl. Skin	5"	5-1/4"	3	1070



Phone (800) 426-2009 / (509) 453-8271 • Fax: (509) 457-2456

[www.rankinequipment.com](http://www.rankinequipment.com)



# FLAIL MOWERS / SHREDDERS



## Innovative, Rugged & Labor Saving Attachments



[www.rankinequipment.com](http://www.rankinequipment.com)



# SEVERE DUTY FLAIL MOWERS / SHREDDERS

**seppi m.**  
MULCHING EQUIPMENT SPECIALISTS



VARIABLE OFFSET HITCH • 60-100 HP



Hammer Knife

## S9C SERIES

### FEATURES

- Low profile belt housing and gearbox
- Three rows forged bolt-on re-cutter bars
- Bolt-on hardox internal wearplate
- 150 HP gearbox with built in over-running clutch
- 5 belt drive, rated for 4" material
- Hydraulic linear sideshift - provides up to 22" offset
- Close coupled for tractor stability
- Adjustable rear hatch
- High tensile steel hood
- Rotor bearings are double self aligning
- Safety Protection: Front Double Row Chains and Rear Rubber Flap

S9C SERIES Flail Mowers/Shredders are designed for severe conditions and are ideal for mulching prunings and mowing heavy grass. Available in 69", 79", 89", & 118" cutting widths. The 2000 RPM rotor is equipped with 3 lb. drop forged hammer knives designed to mow grass and shred brush up to 4" diameter. An adjustable rear hatch in open position discharges grass and allows tractor speeds up to 6 MPH, and in closed position contains and further shreds brush to a finer mulch. The hydraulic sideshift hitch allows quick setting from center mount to offset and is close coupled to the tractor for stability. Equipped with chain guards in front and rubber shielding on rear for safety protection. The "low profile" belt housing and gearbox is a great advantage when operating in orchards and vineyards.

MODELS	WORKING WIDTH	OVERALL WIDTH	HP REQ'D	HITCH	FLAILS	HOUSING THICKNESS	ROTOR DIA. LESS BLADES	NO. OF BELTS	WEIGHT
S9C-175	69"	75"	50-60	Cat. 2 Hyd Offset	18 Hammers	1/4" double wall	6-1/4" x 5/8" Wall	5	1795
S9C-200	79"	85"	55-65	Cat. 2 Hyd Offset	21 Hammers	1/4" double wall	6-1/4" x 5/8" Wall	5	1925
S9C-225	89"	95"	65-75	Cat. 2 Hyd Offset	21 Hammers	1/4" double wall	6-1/4" x 5/8" Wall	5	2055
S9C-300	118"	124"	90-100	Cat. 2 Hyd Offset	30 Hammers	1/4" double wall	6-1/4" x 5/8" Wall	5	2670

# FLAIL MOWERS / SHREDDERS

**seppi m.**  
MULCHING EQUIPMENT SPECIALISTS



VARIABLE OFFSET HITCH • Up to 85 HP



Hammer Knife


## SMO SERIES

### FEATURES

- Variable Offset Series - provides up to 24" offset
- Variable rear mount
- Cat. 1 & 2, 3-point hitch
- Shreds brush & prunings up to 3"
- Drop forged hammer knives and cutter bars
- 85HP gearbox with built-in overrunning clutch

Ideal for vineyards, orchards, parks, pastures, rental yards and heavy cover crop applications.

Rear hatch is slotted to accept optional rake teeth for applications that require additional pick up of material.

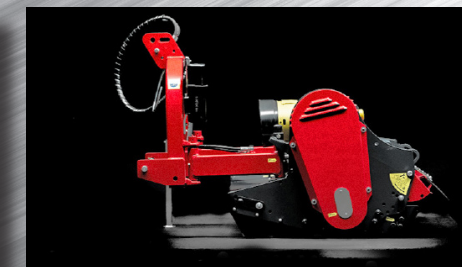

MODELS	WORKING WIDTH	OVERALL WIDTH	HP REQ'D	HITCH	FLAILS	HOUSING THICKNESS	ROTOR DIA. LESS BLADES	ROLLER DIA.	NO. OF BELTS	WEIGHT
SMO-175	69"	78"	40	Cat. 1 & 2 Variable Offset	18 Hammers	5MM Dbl. Skin Front & Rear	5-1/2"	5-1/4"	4	1210
SMO-200	79"	88"	45	Cat. 1 Center Variable Offset	21 Hammers	5MM Dbl. Skin Front & Rear	5-1/2"	5-1/4"	4	1368
SMO-225	89"	99"	50	Cat. 1 Center Variable Offset	21 Hammers	5MM Dbl. Skin Front & Rear	6-1/2"	6"	5	1521
SMO-250	98"	105"	55	Cat. 1 & 2 Variable Offset	24 Hammers	5MM Dbl. Skin Front & Rear	6-1/2"	6"	5	1697