

ERSKINE[®]
ATTACHMENTS LLC

www.erskineattachments.com

800.437.6912

COLD PLANER

SKID STEER ATTACHMENT

SO MEAN IT'S COLD...

Highly versatile Cold Planers are adaptable to a wide variety of job environments including road repair, bridge deck repair, landscaping, municipal, shopping center and utility work.

The Cold Planer is easy to maneuver around manhole and storm drains; excellent for bridge decks where heavier, dedicated planers are not allowed. Hydraulic side-shift and depth control allows skid steer operators to shift it up to 22" for maneuvering close to buildings and other obstacles from the comfort of your seat.

FEATURES

- Adjustable to a wide variety of job environments including road construction, landscaping, bridge deck repair, municipal, shopping center, and utility work
- Easy to maneuver around manholes and storm drains; excellent for bridge decks where heavier dedicated planers are not allowed
- Two tools in one; cut asphalt and concrete with the same machine
- Side-Shift feature moves planer from left to right for maximum maneuverability
- Our universal attachment plates fit most skid steers

800.437.6912

© 2019 Erskine Attachments, LLC. All rights reserved.

022219

ERSKINE[®]
ATTACHMENTS LLC

COLD PLANER

SKID STEER ATTACHMENT



Model	CP18	CP24	CP36	CP48
Part Number	900938	900939	901430	901431
Depth of Cut	0-6"	0-6"	0-6"	0-6"
Width of Cut	18"	24"	36"	48"
Number of Teeth	48	60	78	90
Standard Side-Shift	24" Hydraulic	24" Hydraulic	24" Hydraulic	24" Hydraulic
Tilt	16°	16°	8°	8°
Hydraulic Requirement	22-56 GPM	25-56 GPM	25-112 GPM	25-112 GPM
2,800-6,525 psi	3,000-6,525 psi	3,000-6,525 psi	3,000-6,525 psi	
Weight	1,600 lb.	1,750 lb.	2,550 lb.	2,800 lb.
Depth Control	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Tilt Control	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Case Drain	Required	Required	Required	Required
Hydraulic Flow Classification	High Flow	High Flow	High Flow	High Flow

Options

Bolt-On Rollers

Pistol Grip Control Harness

Loader Specific Wire Harness

Case Drain Coupler

Factory Installed Couplers

Factory Installed High Flow Couplers

COLD PLANER


SKID STEER ATTACHMENT

Radial piston cam-lobe direct-drive motor

- Max Pressure (5,800 psi)
- Max Power 55 HP
- High Efficiency (90%)
- Very Low Noise

PLANETARY DRUM DRIVE generates higher torque than direct drive packages

ELECTRO-TILT controls allow operator to adjust the position of the drum to match exact job requirements

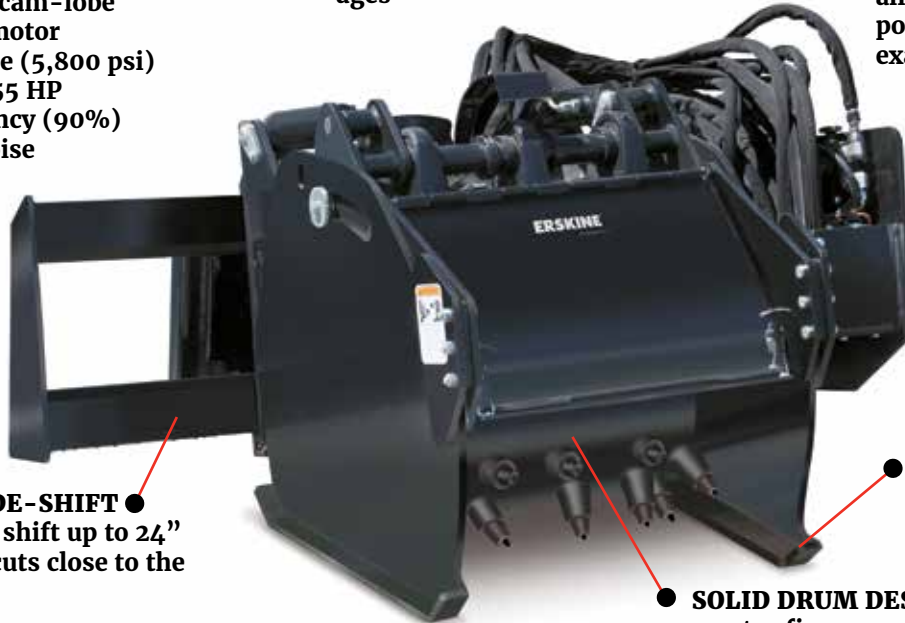

HYDRAULIC SIDE-SHIFT allows planer to shift up to 24" to the right for cuts close to the curbs

RIGHT & LEFT SIDE SKID SHOES can be controlled independently for uneven terrain

SOLID DRUM DESIGN creates fine, recyclable aggregate — material moves to rear of drum to prevent re-milling of material

